



Example Schematic
HMXL66ARC

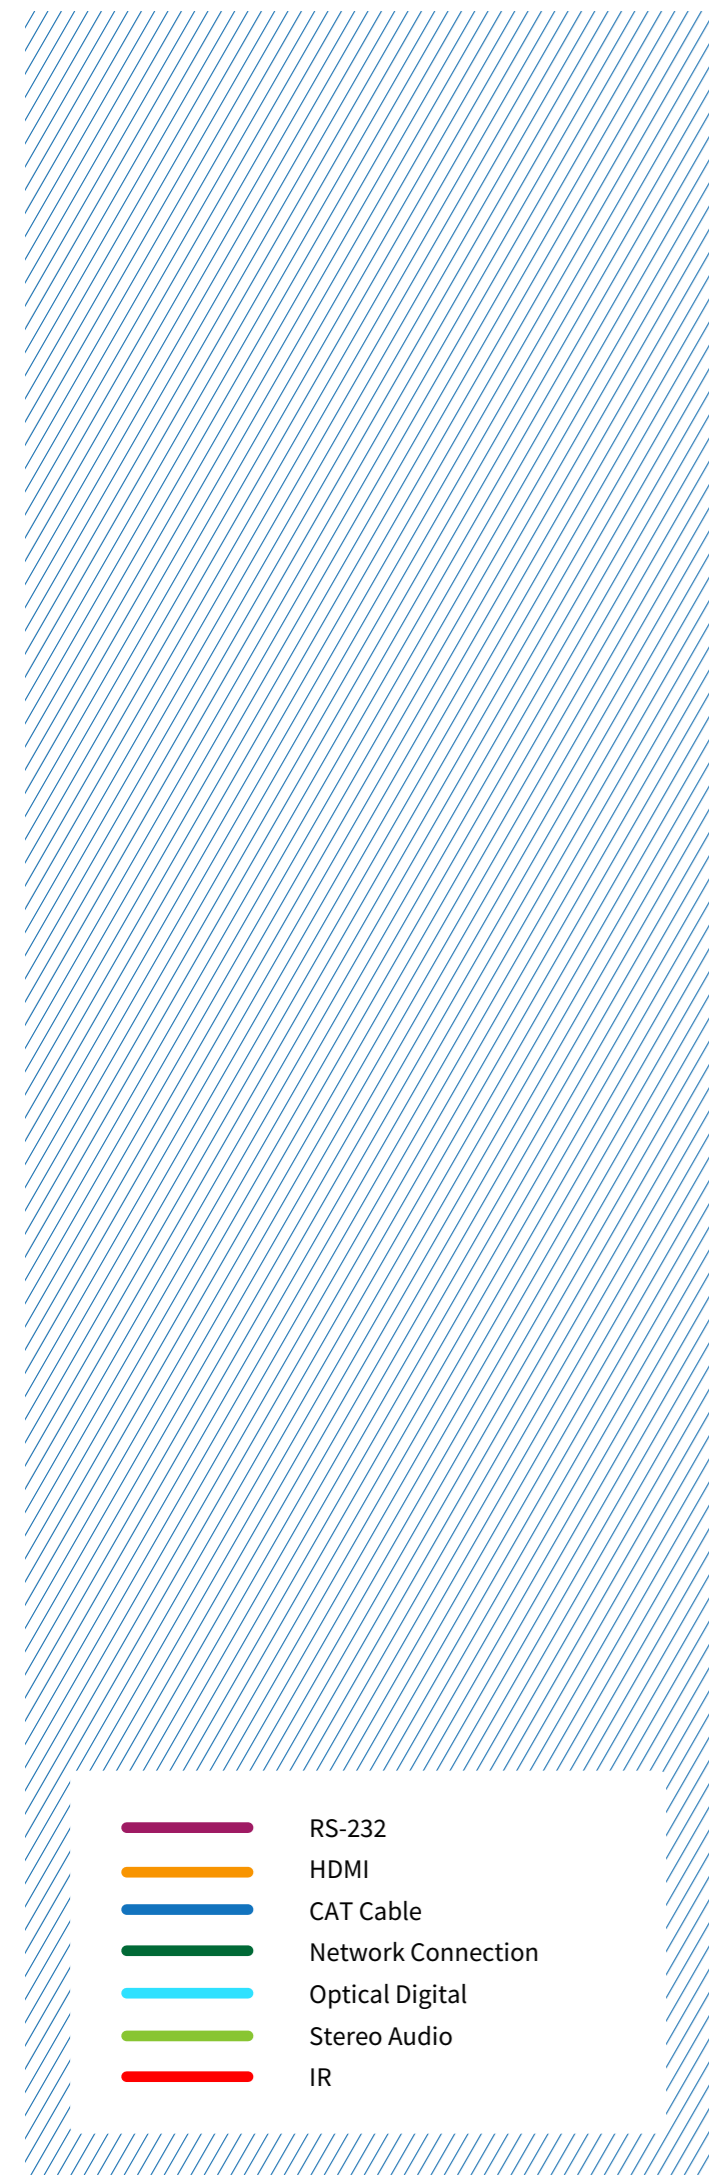

- RS-232
- HDMI
- CAT Cable
- Network Connection
- Optical Digital
- Stereo Audio
- IR

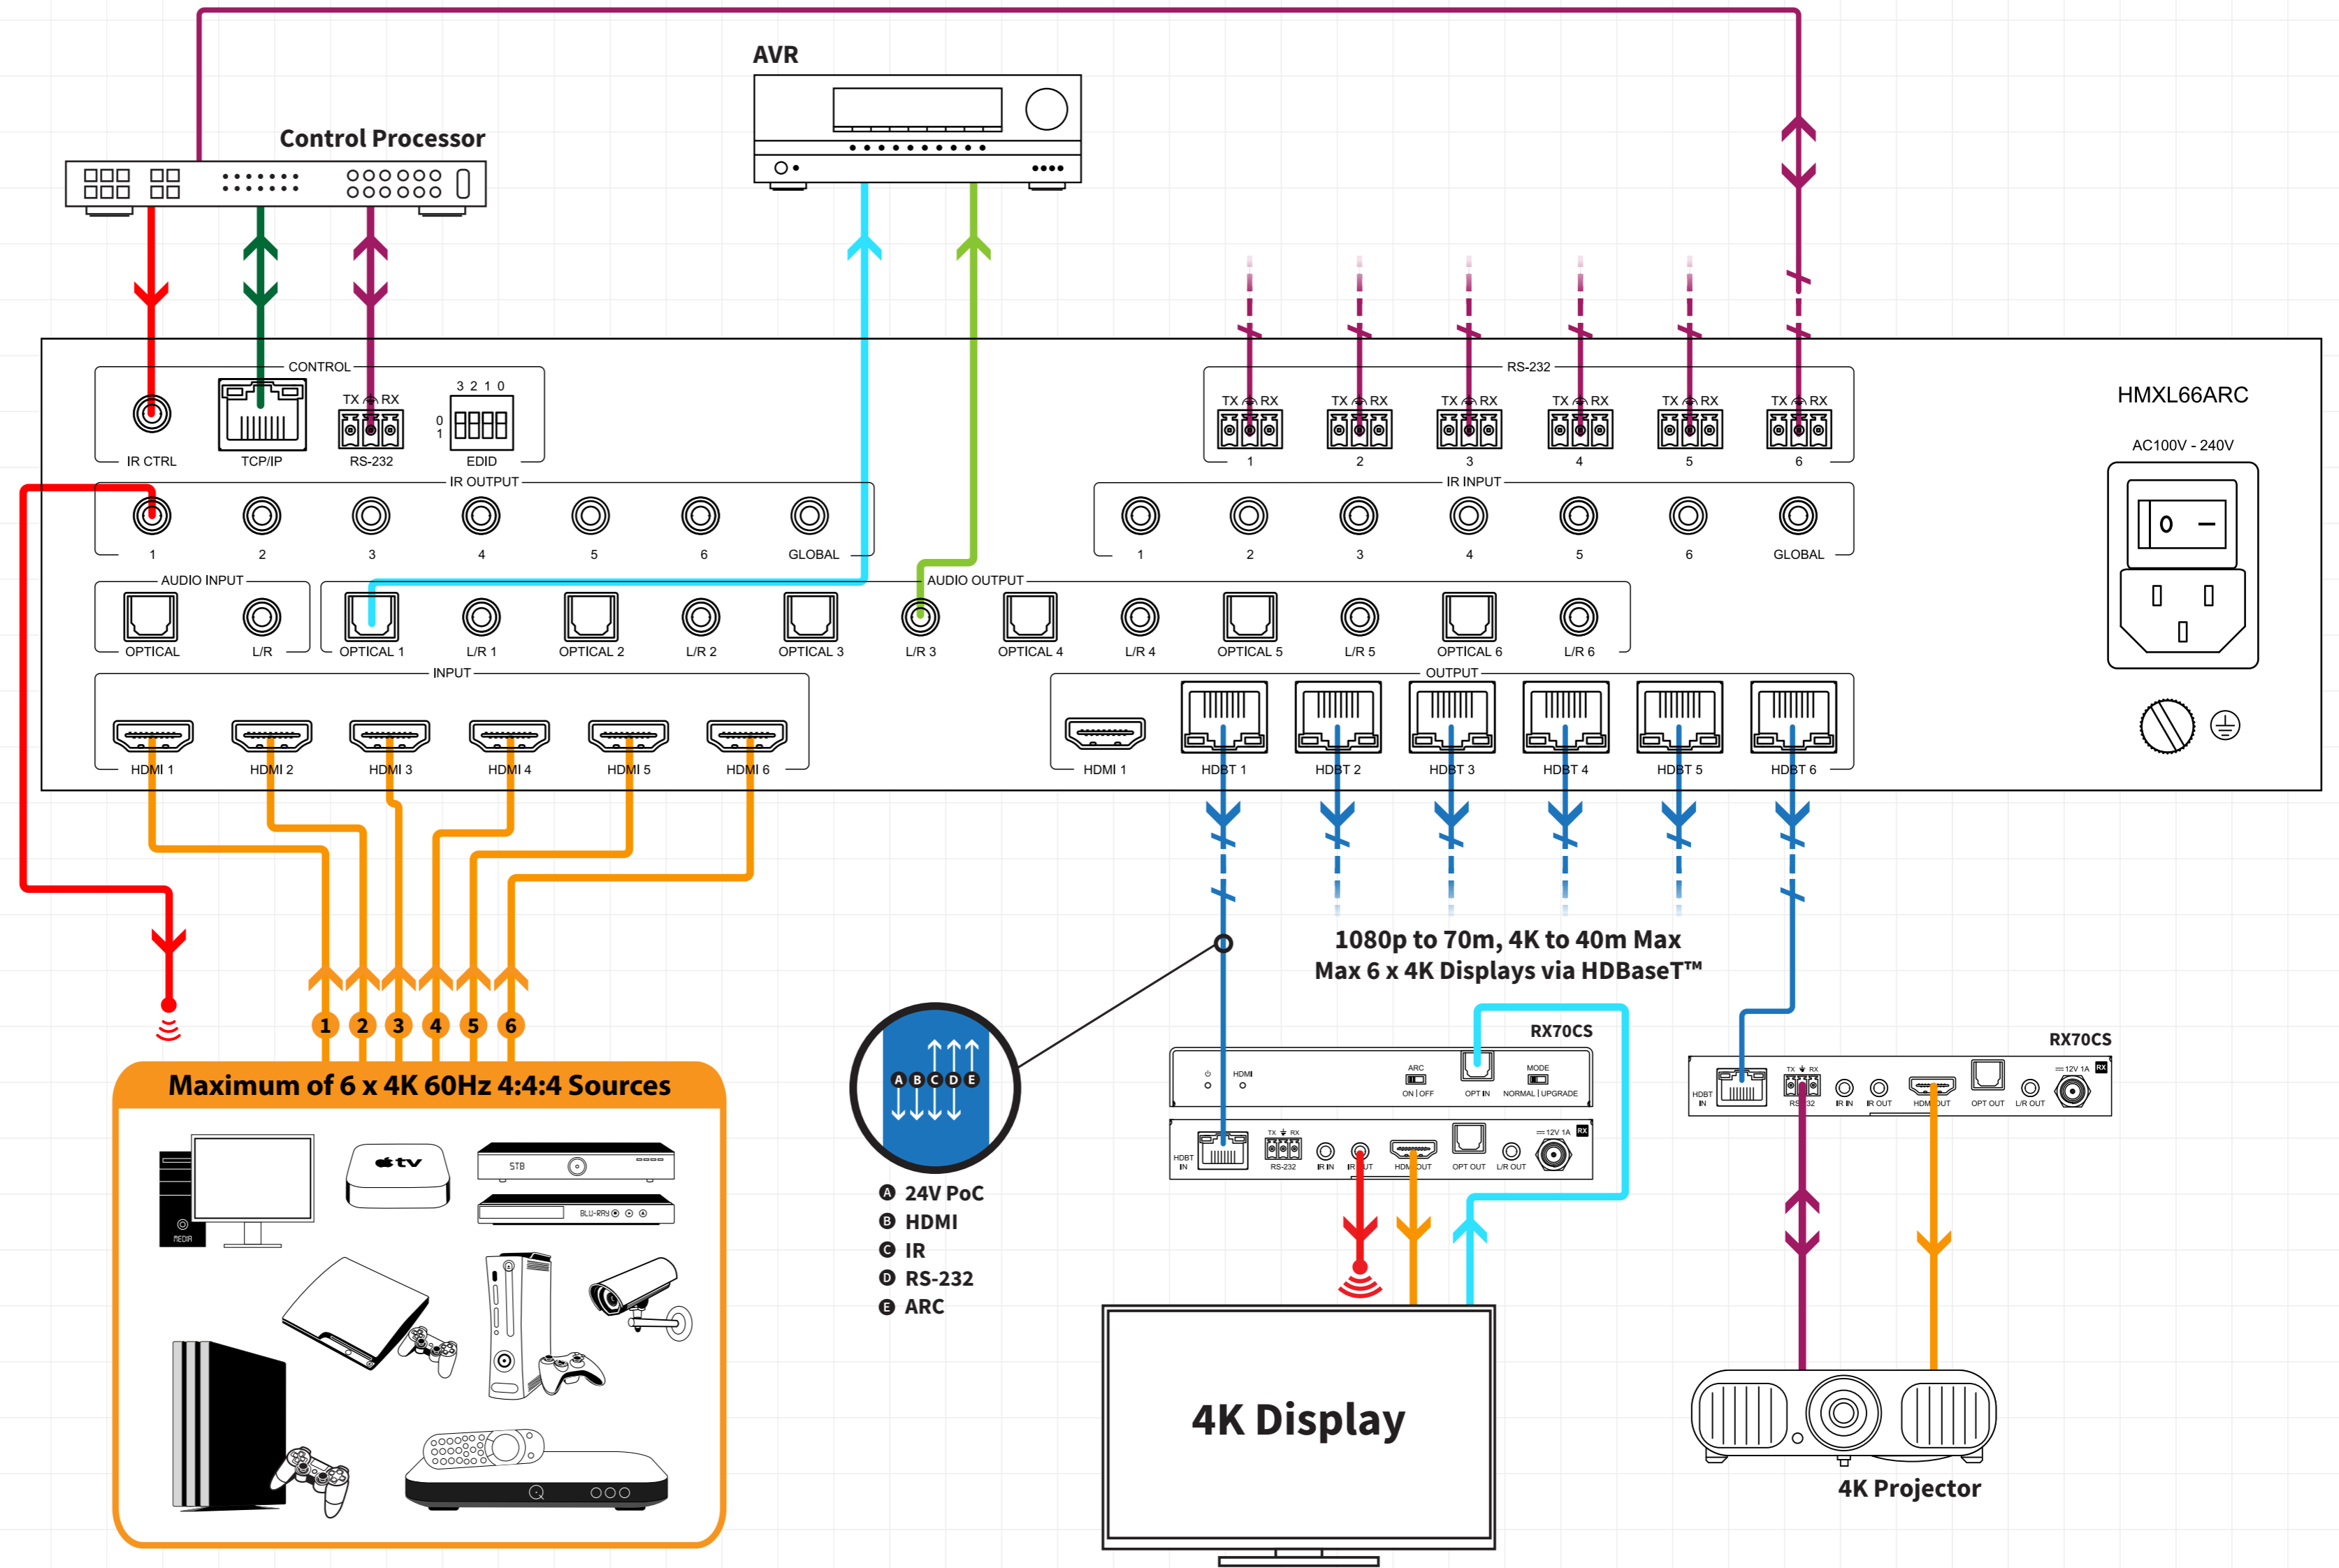

For 24V PoC, HDMI ARC and Optical Audio Return functionality, the RX70CS HDBaseT™ receiver must be used.