# SW41AB-V2

### BLUSTRE/////-->


### 4-Way 4K HDMI Switch

### Description

The SW41AB-V2 is a 4-way HDMI switch with integrated audio breakout and the ability to auto-switch.

The switch supports full HDMI 2.0 and HDCP 2.2 with video resolutions up to and including  $4K \otimes 60Hz 4:4:4$ .



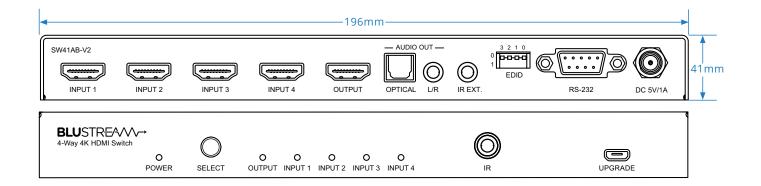

### **Key Features**

- Features 4 x HDMI inputs which can be switched to a single HDMI output
- Supports full HDMI 2.0 specification 4K UHD video (4K @ 60Hz 4:4:4)
- HDCP 2.2 compliant
- Auto-switching capabilities\*
- Supports 3D signal display

BLUSTREAVA-

- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
- HDMI audio breakout to analogue L/R audio and optical digital outputs concurrently
- Control via front panel, RS-232 or IR
- Advanced EDID management

\* See below for details of how to enable the auto-switching function on these units.

@Dante

Odts

Press **Select** button to toggle between HDMI inputs. Auto-switching function is enabled / disabled by pressing and holding the Select button for 5 seconds. Input light will flash 3 times to confirm switching function enabled / disabled



CHDBT

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.

HƏMI

**SDVoE** 

## SW41AB-V2

### BLUSTRE/////-->



### **Specifications**

- Dimensions (W x D x H ): 196 x 104 x 41mm, including connections, without feet (removable)
- Shipping Weight: 0.9kg
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Storage Temperature: -4°F to 140°F (-20°C to 60°C)
- Power Supply: 1 x 5V/1A DC

#### Connectivity

- Video Input Connectors: 4 x HDMI Type A, 19-pin, female
- Video Output Connectors: 1 x HDMI Type A, 19-pin, female

@Dante

**D**Olby

Odts

- Audio Output Connectors: 1 x Optical (S/PDIF) & 1 x Analogue audio L/R (3.5mm stereo jack)
- IR Input Ports: 1 x 3.5mm stereo jack
- RS-232 Serial Port: 1 x DB9, female

#### **Included Accessories**

Power Supply	1 x 5V / 1A DC
Remote Control	1 x Remote Control
Mount	1 x Mounting Set
IR Accessories	1 x IR Reciever (IRR)

#### **Regulatory Compliance**

BLUSTREAVA-



SDVoE



CHDBT

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.

Homi